

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 September 2005 (09.09.2005)

PCT

(10) International Publication Number
WO 2005/083742 A2

(51) International Patent Classification⁷: **H01J 49/42**,
49/40

3TR (GB). **DING, Li** [CN/GB]; 1 Wenlock Road, Sale,
Cheshire M33 4SS (GB).

(21) International Application Number:
PCT/GB2005/000671

(74) Agent: **BIBBY, William, Mark**; Mathisen, Macara &
Co., The Coach House, 6-8 Swakeleys Road, Ickenham,
Uxbridge UB10 8BZ (GB).

(22) International Filing Date: 23 February 2005 (23.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0404285.9 26 February 2004 (26.02.2004) GB

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(71) Applicant (for all designated States except US): **SHI-
MADZU RESEARCH LABORATORY (EUROPE)
LIMITED** [GB/GB]; Wharfside, Trafford Wharf Road,
Manchester, M17 1GP (GB).

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(72) Inventors; and
(75) Inventors/Applicants (for US only): **SUDAKOV,
Michael** [RU/GB]; 6 Forest Drive, Sale, Cheshire M33

[Continued on next page]

(54) Title: A TANDEM ION-TRAP TIME-OF-FLIGHT MASS SPECTROMETER

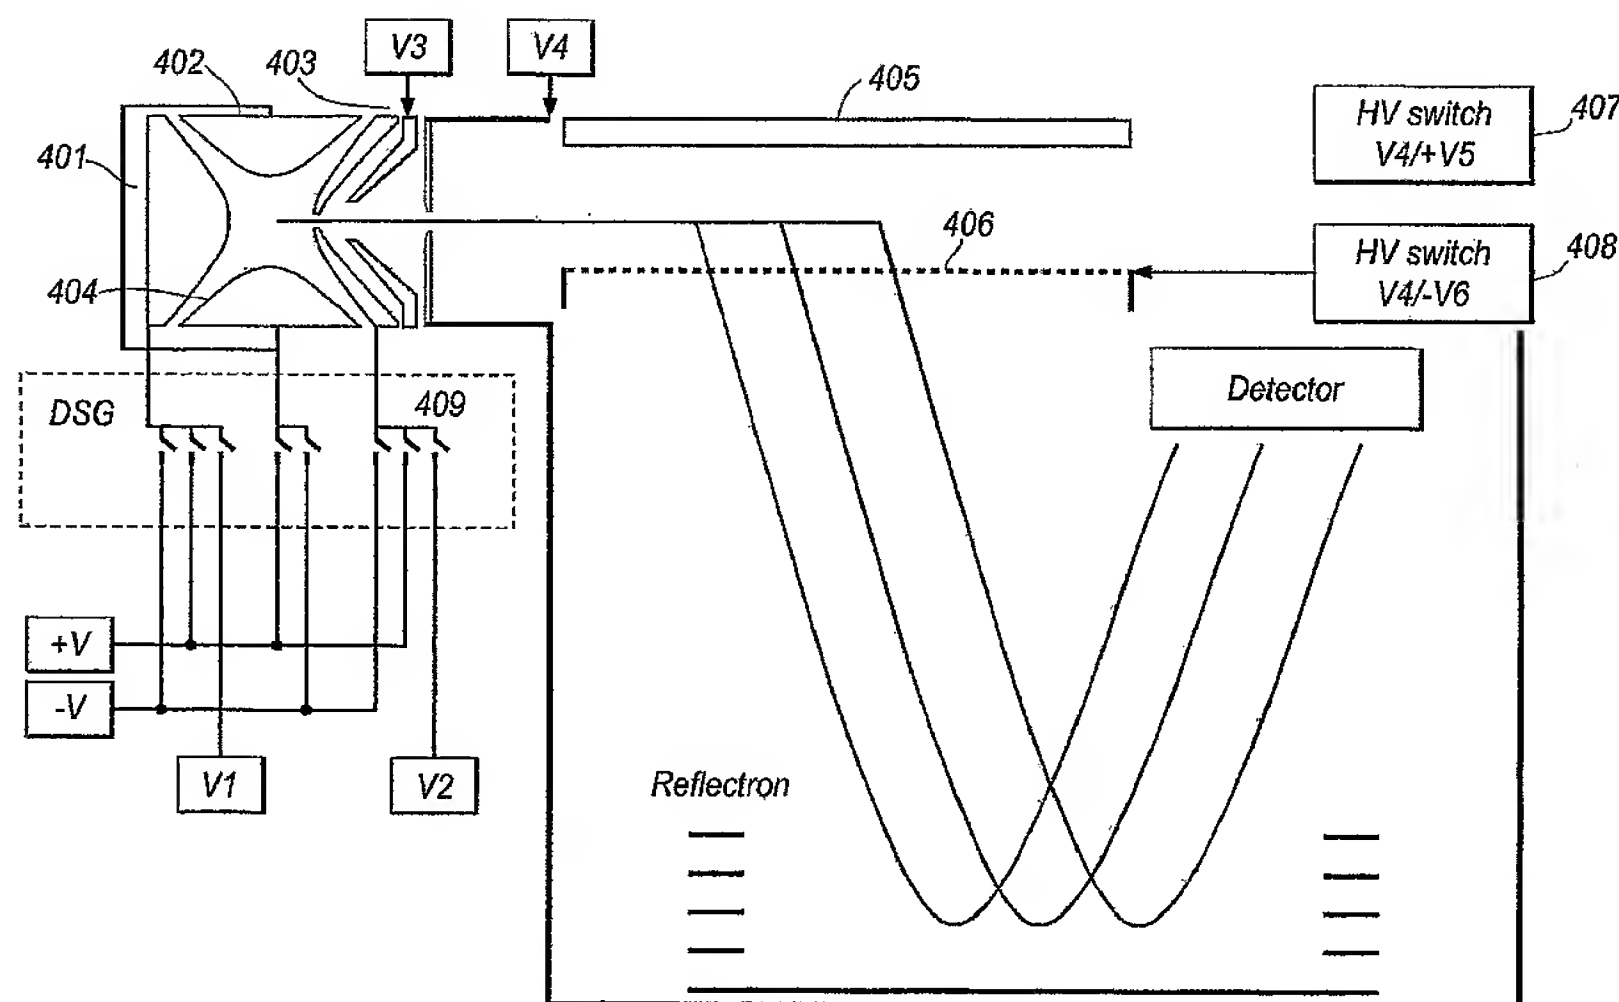

(57) Abstract: A tandem linear ion trap and time-of-flight mass spectrometer, where the ion trap has a straight central axis orthogonal to the flight path of the mass spectrometer. The ion trap comprises a set of electrodes, (401, 403, 402, 404) at least one of the electrodes has a slit for ejecting ions towards the mass spectrometer; a set of DC voltage supplies (+V, -V, V1, V2) to provide discrete DC levels and a number of fast electronic switches (409) for connecting/disconnecting the DC supplies to at least two of the electrodes; a neutral gas filling the ion trap and a digital controller to provide a switching procedure of ion trapping, manipulation with ions, cooling and including a state at which all ions are ejected from the ion trap towards the mass spectrometer.

WO 2005/083742 A2



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*